




## Technical Data

<b>Material</b>	Acrylic glass
<b>Building material class</b>	B1 to DIN 4102
<b>Thickness</b>	3 mm
<b>Colour</b>	Carré translucent grey Carré translucent green Carré translucent blue white
<b>Dimensions</b>	625 x 625 mm

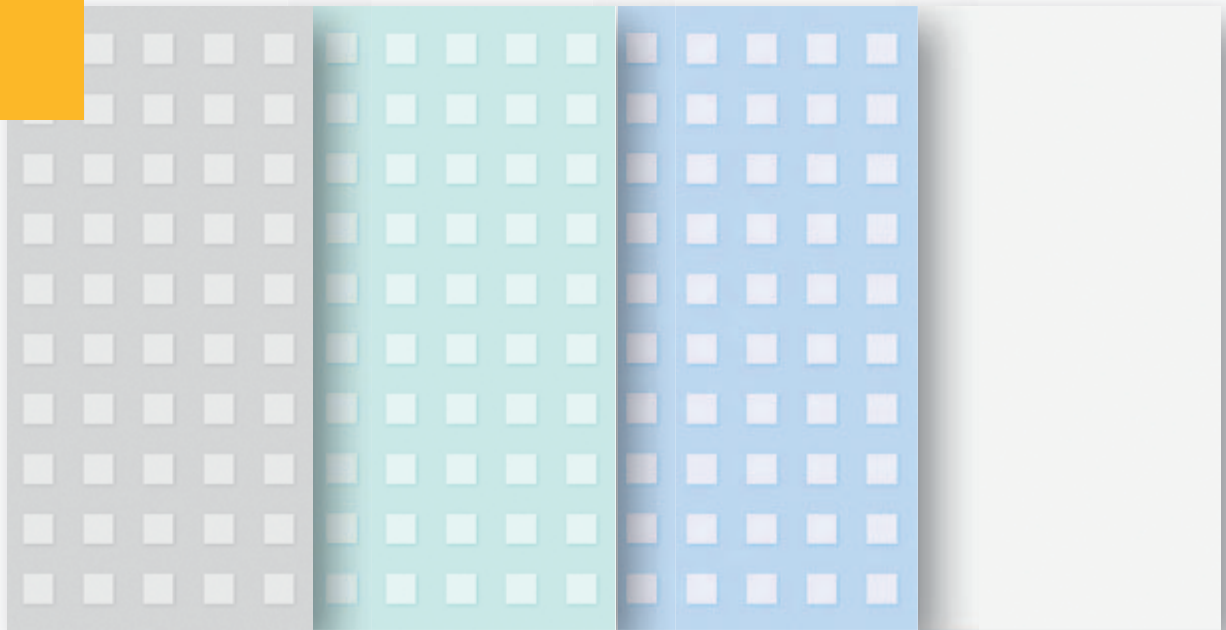


Carré translucant  
grey

Carré translucant  
green

Carré translucant  
blue

white


**Systems**

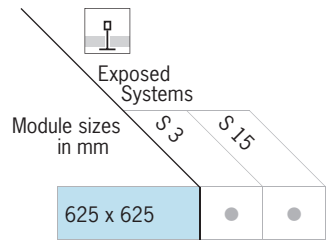




OWAtecta® metal cassettes  
for the configuration of illuminated ceilings  
with laminated safety glass

## Technical Data


<b>Material</b>	Aluminium
<b>Building material class</b>	A1 to DIN 4102
<b>Colour</b>	as nominated
<b>Sound reduction*</b>	on request
<b>Sound absorption</b>	 on request
<b>Moisture resistance</b>	 on request
<b>Fire protection</b>	 no fire resistance

\* Dependent on system, soffit  
and other factors


**Ceiling Section Type B:**



Type B1




Type B2




Type B3

System connection:

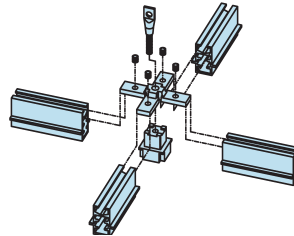


Type BK

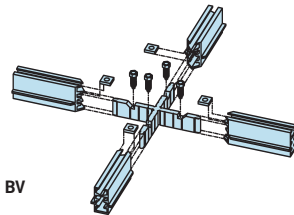


Type BV

Wall Junction:

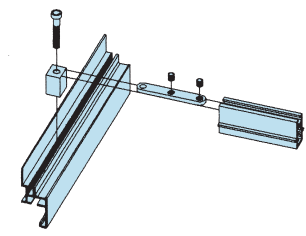


Type WB 1




Type WB 2


**Ceiling Section Type C:**



Type C1




Type C2




Type C3

System connection:

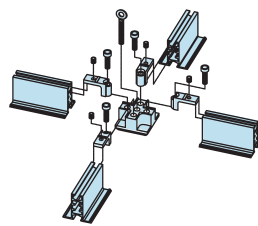


Type CK

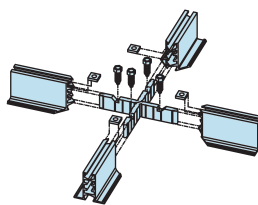

Type CV

Wall Junction:

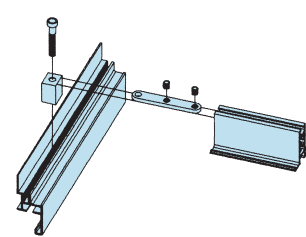

Type WC 1

**System**

Geometric versatility.

Aluminium connection section can be delivered straight.

**Module divider**

Using mineral wool tiles maximum module measurement: 1250 mm x 1250 mm

Using safety glass (VSG); only Type C maximum module size: 1000 mm x 1000 mm

Using OWAtecta® metal tiles max. module size on request

**Dimensions**

on request